




V28 V68




Technical Features

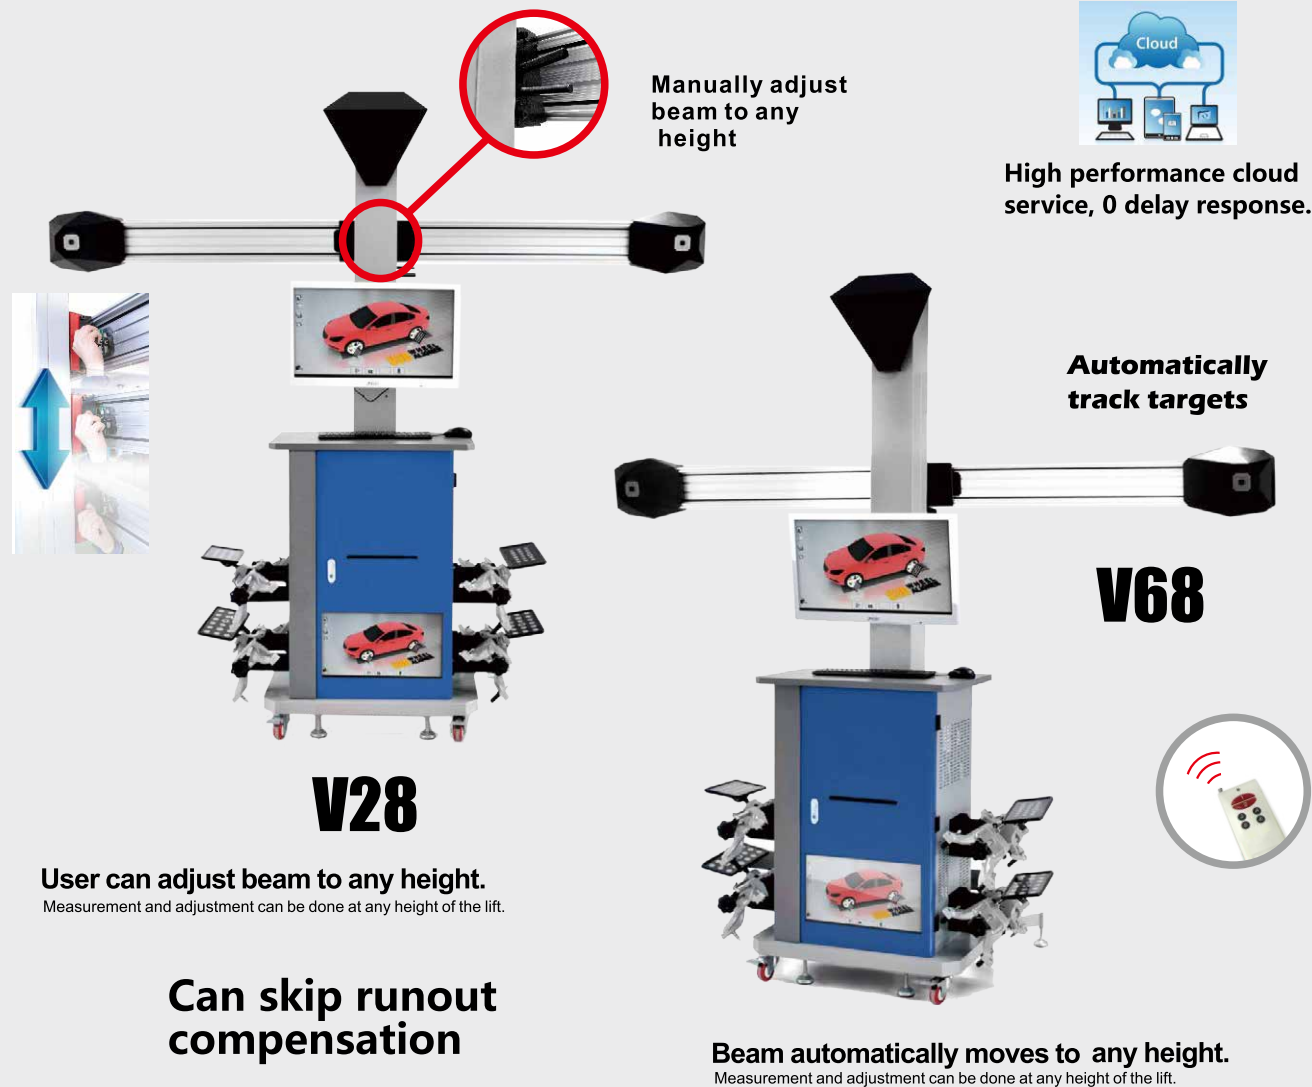

HD special industrial camera



High speed CPU



Mini target



Double display data



Usable for long wheelbase vehicle adjustment



Camera can be replaced with built in compensation reference



Multiple compensation ways or no compensation available



Field installation, no need to calibrate



Self-diagnosis and correction function



Working efficiency management function



Specific environmental adaptivity and fill-in light flash function of cameras



Running PC with an optional handheld remote controller



Windows operation system



Operation status recorder (Black box)






All chassis data measurement including wheelbase, wheel track, axle offset and etc




Database covering more than 20,000 car models worldwide, intelligent update at any time

Standard Configuration



Items	Front wheel					Rear wheel			
	Toe	Camber	Caster	Steering Axis Inclination	Set-back	Toe	Camber	Set-back	Thrust-angle
Accuracy	±1'	±1'	±2'	±2'	±1'	±1'	±1'	±1'	±1'
Range	±24°	±10°	±20°	±20°	±10°	±24°	±10°	±10°	±10°



a set of cabinet



4 MINI targets



a set of LCD double display screen



2 turn plate blocks




2 rubber wedges



2 turn plates



a set of steering fixer



a set of brake fixer



4 clamps



a set of PC and monitor



a set of printer



a remote controller

can be used with pit and all lifts like small scissor, 2-post lift etc.



Pit



small scissor



2-post lift



big scissor



2-post lift



4-post lift