



Fixed model



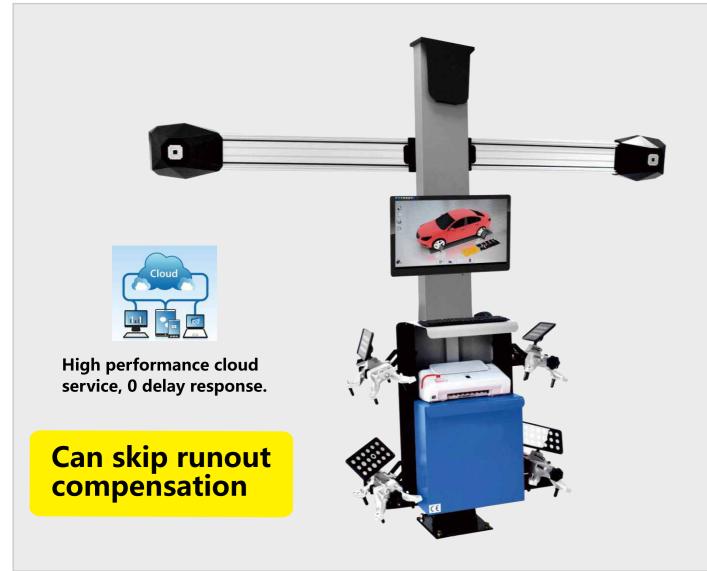

	Packing size with iron bet plywood N.W.:94 W H: adjustable	Packing size with iron belt plywoo	od box	ox			Front wheel				Rear wheel			
Standard H		KG L W N.W.	:45 KG ::73 KG	Items	Toe	Camber		IIIGIIIIatioii	Set-back	Toe			Thrust-angle	
Configuration	H: adjustable D: 550mm W: 2800mm	mm T	0 mm	Accuracy Range	±1′ ±24°	±1′ ±10°	±2′ ±20°	±2' ±20°	±1′ ±10°	±1′ ±24°	±1′ ±10°	±1′ ±10°	±1′ ±10°	
a set of cabinet	4 MINI targets	a set of printer	2 tu	2 turn plate blocks		cks	2 rubber wedges				2 turn plates			
a set of steering fixer	a set of brake fixer	11" 25"	а	set of mo	PC an	d								

Technical Features



HD special industrial camera

High speed CPU



Self-diagnosis and correction function



Specific environmental adaptivity and fill-in light flash function of cameras



Mini target



Windows operation system



Usable for long wheelbase vehicle adjustment



All chassis data measurement including wheelbase, wheel track, axle offset and etc



Camera can be replaced with built in compensation reference



Database covering more than 20,000 car models worldwide, intelligent update at any time



Multiple compensation ways or no compensation available



Field installation, no need to calibrate





Optional double display function